



Product Overview

NCP6335: 4 A Processor Supply with Dynamic Voltage Scaling, I2C Programming. Transient load helper

For complete documentation, see the data sheet

Product Description

The NCP6335 is a synchronous buck converter optimized to supply recent micro processors (ARM core processor, GPU) that demand high power at low voltages of portable applications powered by one cell Li-ion or three cell Alkaline/NiCd/NiMH batteries.

The device is able to deliver up to 4.0 A, with programmable output voltage from 0.6 V to 1.4 V. It can share the same output rail with another DCDC and works as a transient load helper. Operation at a 3 MHz switching frequency allows the use of small components. Synchronous rectification and automatic PWM/PFM transitions improve overall solution efficiency.

The NCP6335 is in a space saving, low profile 2.0 x 1.6 mm CSP 20 package.

Features

- 2.3 V to 5.5 V Input Voltage Range
- 3 MHz Switching Frequency
- DVS support through I2C and VSEL pin
- Enabling with pins or I2C
- IC access in off mode
- Transient Load Helper

Benefits

- Support Latest Battery
- Reduced output inductor and capacitor size
- Optimizes processor power
- Flexible enabling and disabling
- Pre programming at low power
- Share the same output rail with another DCDC without sinking current on shared rail

Applications

- Battery powered applications
- Power supply for processor with low core voltage


End Products

- Cellular phones, smart phones, tablets

Part Electrical Specifications

Product	Compliance	Status	Topology	Control Mode	V _{CC} Min (V)	V _{CC} Max (V)	V _O Typ (V)	I _O Typ (A)	Efficiency (%)	f _{sw} Typ (kHz)	Package Type
NCP6335DFCT1G	Pb-free	Product Preview	Step-Down	Voltage Mode	2.3	5.5	1.1	4	93	3000000	WLCSP20 1.62x2.02
	Halide free										
NCP6335FFCT1G	Pb-free	NEW	Step-Down	Voltage Mode	2.3	5.5	1.1	4	93	3000000	WLCSP20 1.62x2.02
	Halide free										

Application Diagram

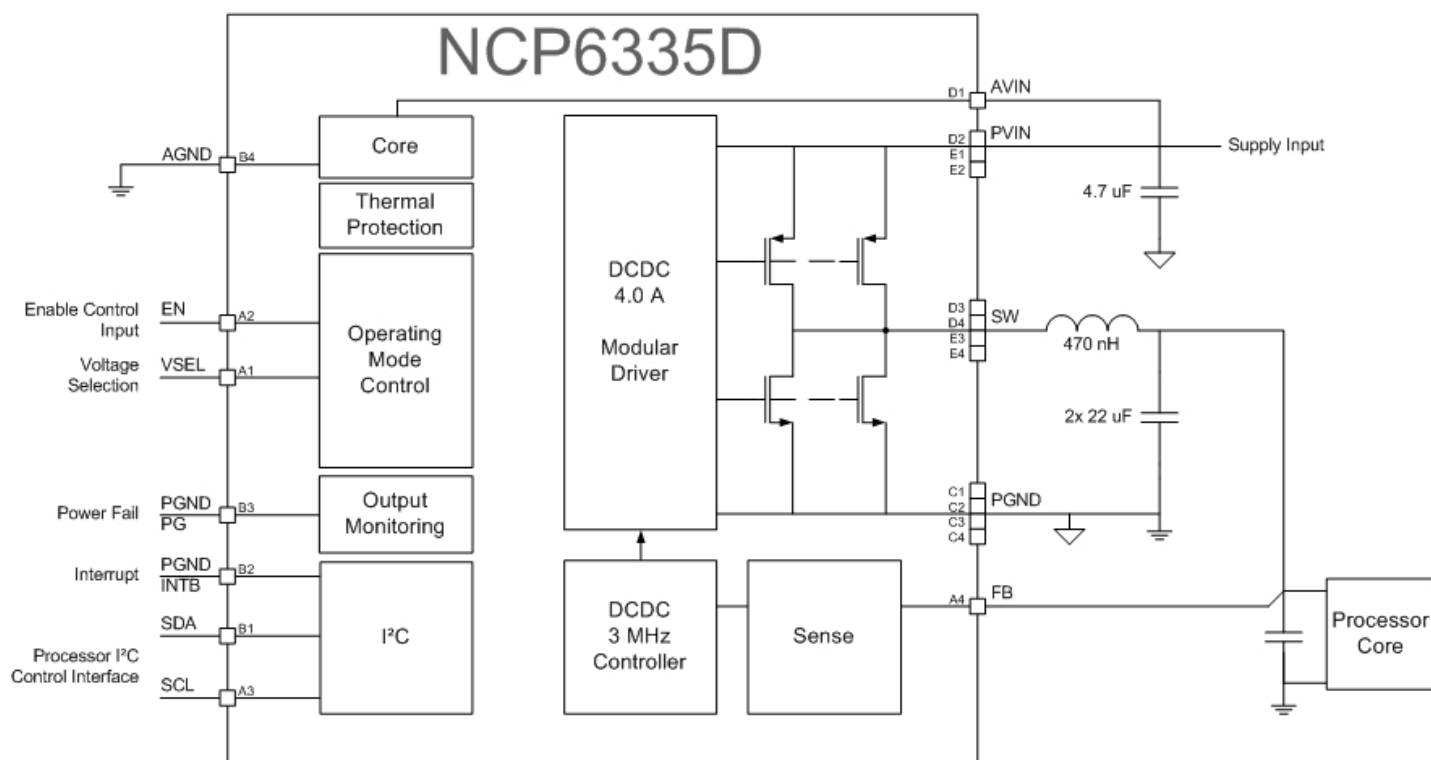

For more information please contact your local sales support at www.onsemi.com

Created on: 5/28/2013