

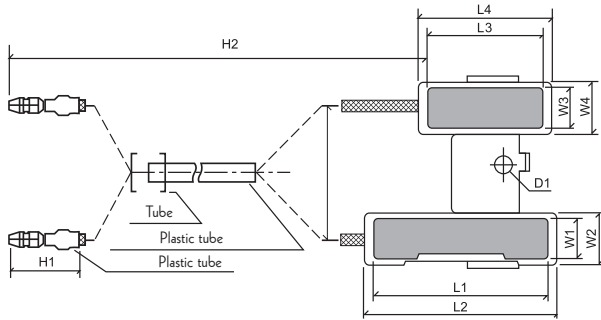


Feature

- Small size & sturdy mechanically safe
- High safety standard
- Application: Motor cycle

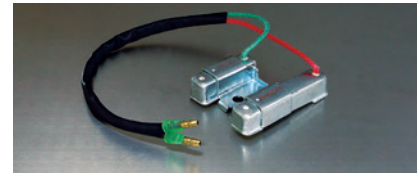

Derating Curve

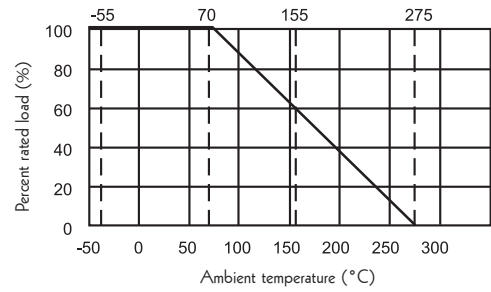

Dimension (mm)

Type	$L_1 \pm 0.5$	$L_2 \pm 1$	$L_3 \pm 0.5$	$L_4 \pm 1$	$W_1 \pm 0.5$	$W_2 \pm 1$	$W_3 \pm 0.5$	$W_4 \pm 1$	H_1 Max.	H_2 $^{+10}_{-0}$	D_1 $^{+0.5}_{-0}$	Resistance Range
BCR 20W+5W	64	66	42	44	13	15	13	15	30	250	6.5	0.5Ω - 100Ω

Performance Specification

Temperature coefficient	$\pm 400\text{PPM}/^\circ\text{C}$
Short-time overload	$\Delta R/R \leq \pm(5.0\% + 0.05\Omega)$, with no evidence of mechanical damage
Dielectric withstanding voltage	No flashover, mechanical damage, arcing or insulation breakdown
Temperature cycling	$\Delta R/R \leq \pm(5.0\% + 0.05\Omega)$, with no evidence of mechanical damage
Humidity (Steady State)	$\Delta R/R \leq \pm(5.0\% + 0.05\Omega)$, with no evidence of mechanical damage
Load life in humidity	$\Delta R/R \leq \pm(5.0\% + 0.05\Omega)$, with no evidence of mechanical damage
Load life	$\Delta R/R \leq \pm(5.0\% + 0.05\Omega)$, with no evidence of mechanical damage