SUPER FAST RECOVERY RECTIFIER

SF11 THRU SF18

VOLTAGE RANGE	**50 to 600 Volts**
CURRENT	**1.0Ampere**

DO-41

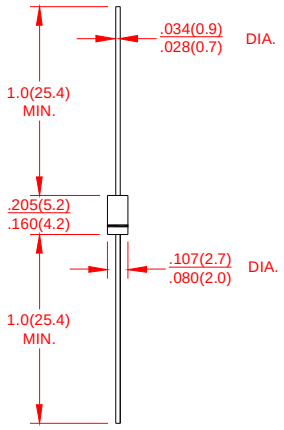

Dimensions in inches and (millimeters)

FEATURES

- Low coat construction
- Fast switching for high efficency.
- Low reverse leakage
- High forward surge current capability
- High temperature soldering guaranteed:
  260℃/10 secods/.375”(9.5mm)lead length at 5 lbs(2.3kg) tension

MECHANICAL DATA

- Case: Transfer molded plastic
- Epoxy: UL94V-O rate flame retardant
- Polarity: Color band denotes cathode end
- Lead: Plated axial lead, solderable per MIL-STD-202E method 208C
- Mounting position: Any
- Weight: 0.012ounce, 0.33grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%

		SYMBOLS	SF 11	SF 12	SF 13	SF 14	SF 15	SF 16	SF 17	SF 18	UNITS
Maximum Repetitive Peak Reverse Voltage		V_{RRM}	50	100	150	200	300	400	500	600	Volts
Maximum RMS Voltage		V_{RMS}	35	70	105	140	210	280	350	420	Volts
Maximum DC Blocking Voltage		V_{DC}	50	100	150	200	300	400	500	600	Volts
Maximum Average Forward Rectified Current 0.375”(9.5mm) lead length at T_A= 55℃		$I_{(AV)}$	1.0								Amp
Peak Forward Surge Current 8.3mS single half sine wave superimposed on rated load (JEDEC method)		I_{FSM}	30								Amps
Maximum Instantaneous Forward Voltage @ 1.0A		V_F	0.95				1.25		1.7		Volts
Maximum DC Reverse Current at Rated DC Blocking Voltage	T_A = 25℃	I_R	5.0								µA
	T_A = 125℃		50								
Maximum Reverse Recovery Time Test conditions IF=0.5A,IR=1.0A,IRR=0.25A		trr	35								ns
Typical Thermal Capavitance (Measured at 1.0MHz and applied rever voltage of 4.0V)		C_J	15				10				PF
Typical Thermal Resistance(NOTE 1)		$R_{\theta JA}$	60								℃/W
Operating Junction Temperature Range		T_J	(-55 to +150)								℃
Storage Temperature Range		T_{STG}	(-55 to +150)								℃

Notes:

1. Thermal resistance from junction to ambient with .375”(9.5mm)lead length, P.C.B. mounted. .

E-mail: sales@cnmic.com **Web Site:** www.cnmic.com

www.BDTIC.com/MIC

SUPER FAST RECOVERY RECTIFIER

SF11 THRU SF18	VOLTAGE RANGE	50 to 600 Volts
	CURRENT	1.0Ampere

RATING AND CHRACTERISTIC CURVES SF11 THRU SF18

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

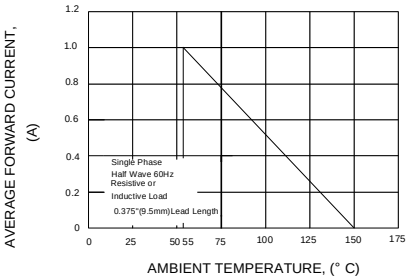

FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

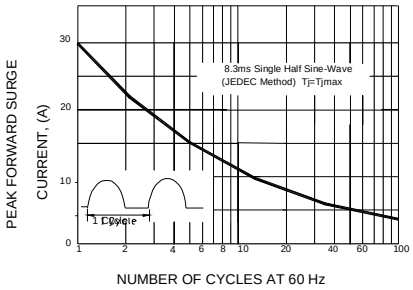

FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

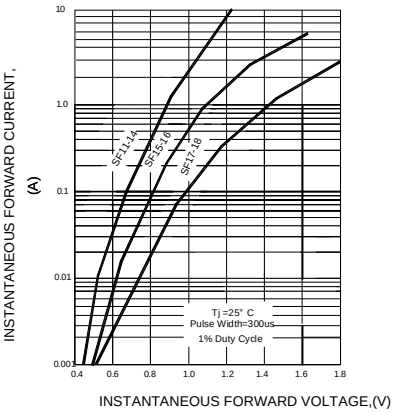

FIG.4-TYPICAL REVERSE CHARACTERISTICS

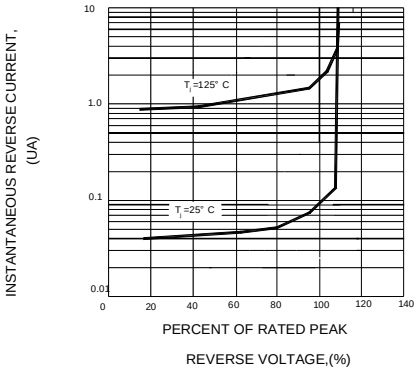

FIG.5-TYPICAL JUNCTION CAPACITANCE

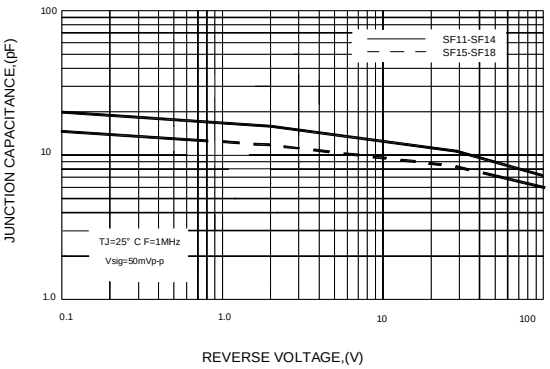

FIG.6-TEST CIRCUIT DIAGRAM AND REVERSE REXOVERY TIME CHARACTERISTIC

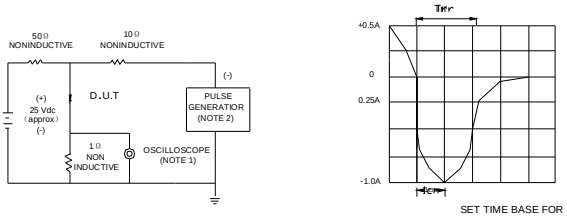

NOTE: 1.Rise Time =7ns max.Input Impedance=1megohm.22pF
2.Rise time=10ns max.Source Impedance=50 ohms

www.BDTIC.com/MIC