

INTRODUCTION:

Adam Tech PLF Series is a complete range of Power Line Filters designed for use in electric equipment that needs to meet FCC and other worldwide agency requirements for EMI/RFI emissions. This series offers numerous termination styles and levels of filtering and circuit protection for specific applications. Included are chassis mount, chassis mount with IEC Power Connector, panel mount and power entry modules with integral fuse and or switch.

FEATURES:

Modules offer compact space and cost effectiveness
Meets low leakage requirements
Superior common mode and differential mode attenuation.

MATING CONNECTORS:

Adam Tech PC series power cords and all international IEC 60320 power supply cords.

SPECIFICATIONS:

Material:

Insulator: Polycarbonate or Nylon 66, glass filled, rated UL94V-0
Insulator Color: Black
Contacts: Phosphor Bronze
Casing: Thermoplastic rated UL94V-0 or Copper Alloy, nickel plated

Terminal Plating:

Quick connect: Nickel over copper underplate
Solder terminals: Tin over copper underplate
PC Pins: Tin over copper underplate

Electrical:

Operation Voltage: 120 / 250V AC
Current Rating: UL & CSA: 15 Amps Max,
VDE: 10 Amps Max.
Insulation Resistance: 3000 MΩ Min.
Dielectric Withstanding Voltage: 1500V AC for 1 Minute
Leakage Current: 0.5mA Max 250V, 50Hz

Temperature Rating:

Operation Temperature: -25°C to +70°C

PACKAGING:


Anti-ESD plastic trays


SAFETY AGENCY APPROVALS:

UL Recognized & CSA Certified, File no. E244331





ORDERING INFORMATION

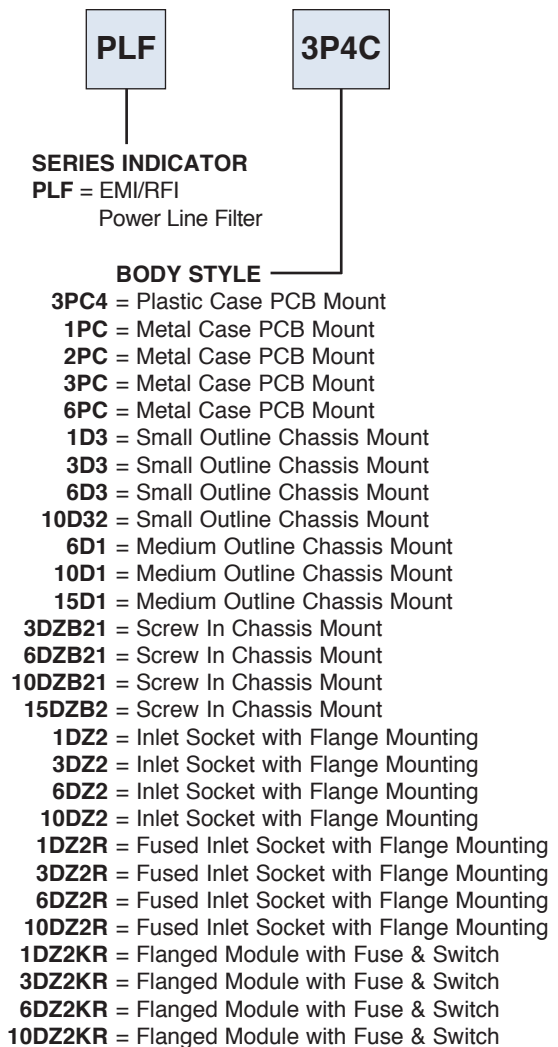




PLF-3PC4

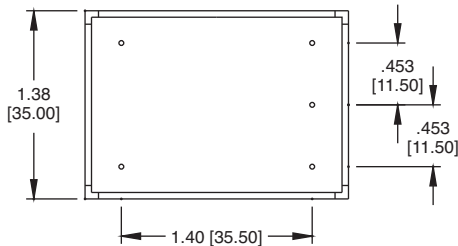



PART NUMBER	RATED VOLTAGE	RATED CURRENT	GROUND CAPACITANCE	LEAKAGE CURRENT
PLF-3PC4	250V AC	3 AMP	2.2 nF	0.5mA MAX.

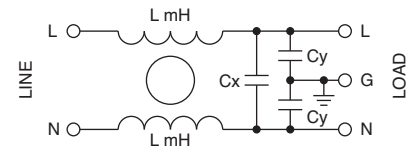

CIRCUIT DIAGRAM


Insertion Loss in dB (Measured in 50Ω systems, as IEC / cispr No. 17)

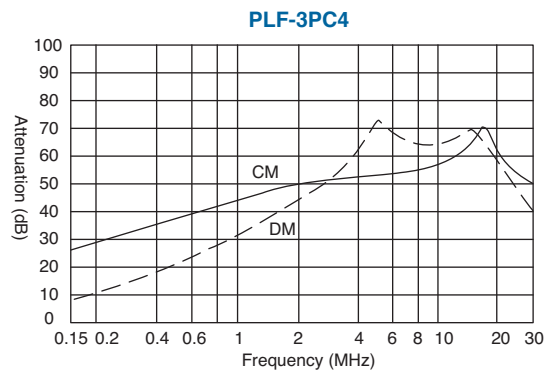




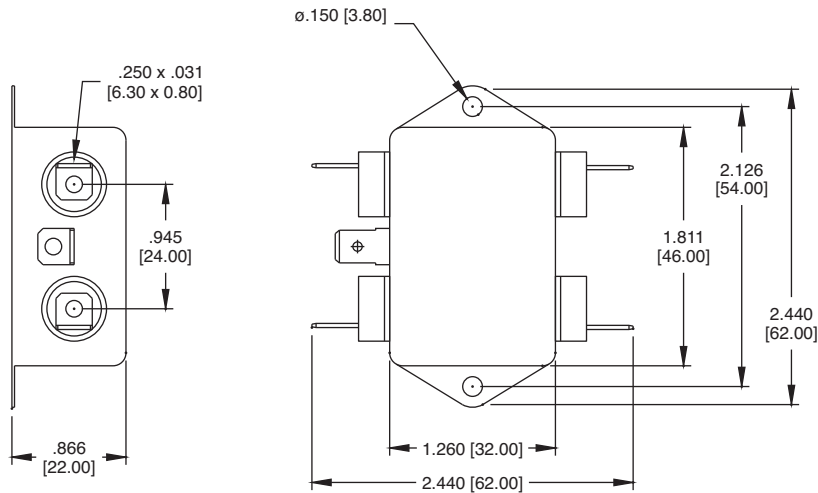



PLF-1D3

PART NUMBER	RATED VOLTAGE	RATED CURRENT	GROUND CAPACITANCE	LEAKAGE CURRENT
PLF-1D3	250V AC	1 AMP	4.7 nF	0.5mA MAX.
PLF-3D3	250V AC	3 AMP	3.3 nF	0.5mA MAX.
PLF-6D3	250V AC	6 AMP	3.3 nF	0.5mA MAX.
PLF-10D32	250V AC	10 AMP	2.2 nF	0.5mA MAX.

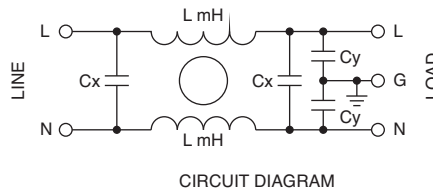

Insertion Loss in dB (Measured in 50Ω systems, as IEC / cispr No. 17)

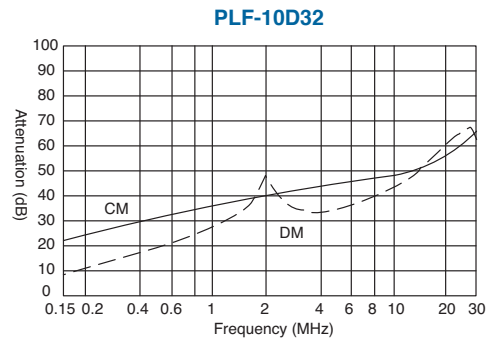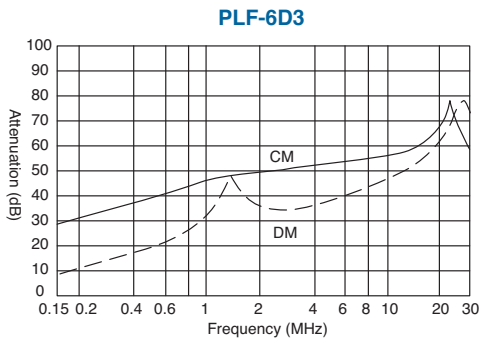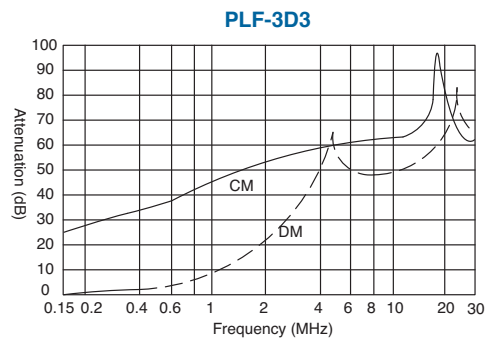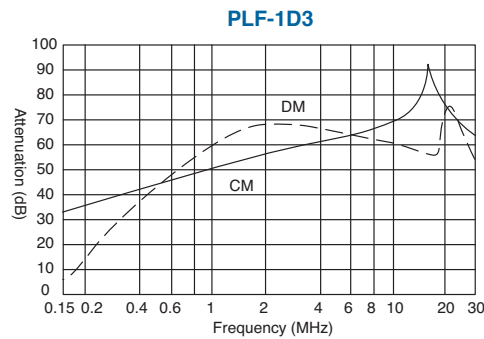


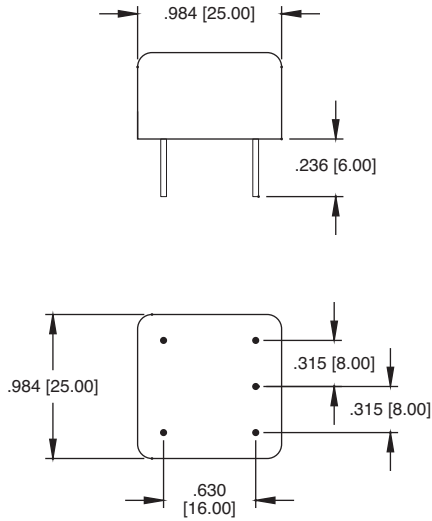





PLF-3PC


DIM "A"	
PLF-1PC	.590 [15.00]
PLF-2PC	.787 [20.00]
PLF-3PC	.787 [20.00]
PLF-6PC	.787 [20.00]

PART NUMBER	RATED VOLTAGE	RATED CURRENT	GROUND CAPACITANCE	LEAKAGE CURRENT
PLF-1PC	250V AC	1 AMP	2.2 nF	0.5mA MAX.
PLF-2PC	250V AC	2 AMP	2.2 nF	0.5mA MAX.
PLF-3PC	250V AC	3 AMP	2.2 nF	0.5mA MAX.
PLF-6PC	250V AC	6 AMP	3.3 nF	0.5mA MAX.

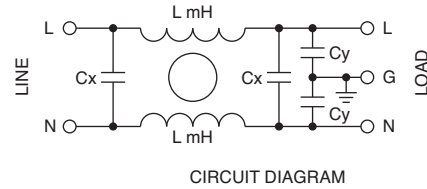


Insertion Loss in dB (Measured in 50Ω systems, as IEC / cispr No. 17)

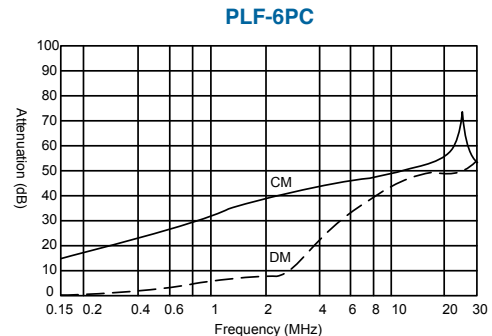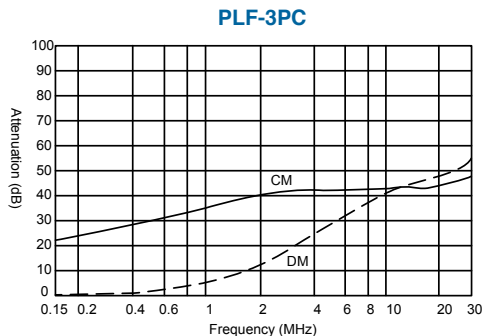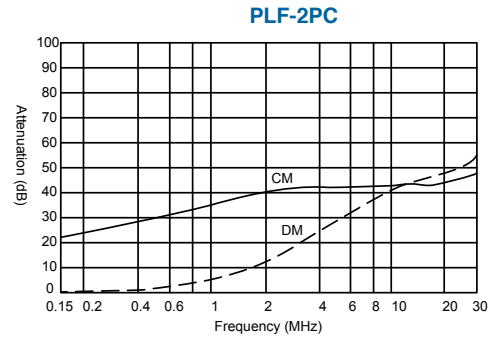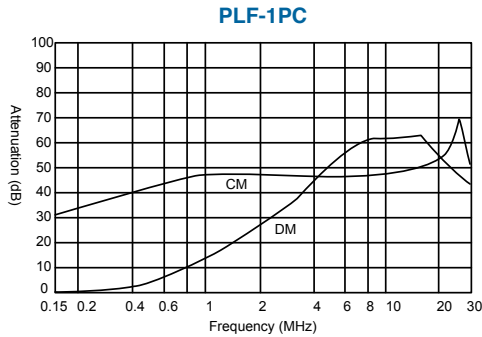




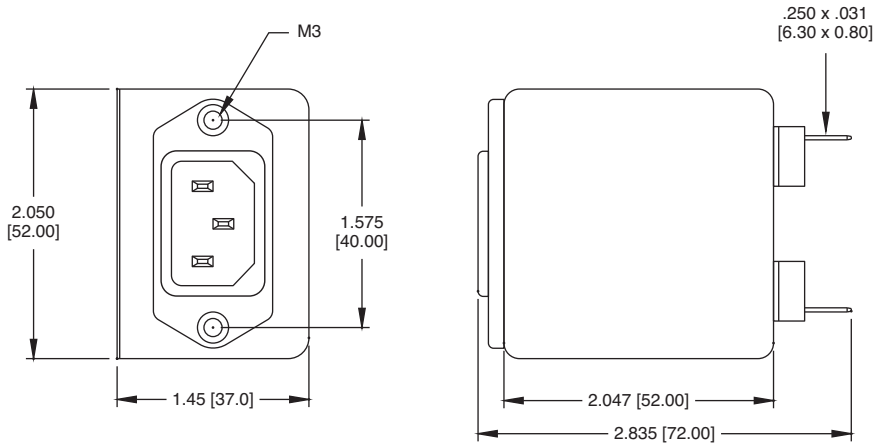




PLF-15DZB2

PART NUMBER	RATED VOLTAGE	RATED CURRENT	GROUND CAPACITANCE	LEAKAGE CURRENT
PLF-3DZB21	250V AC	3 AMP	4.7 nF	0.5mA MAX.
PLF-6DZB21	250V AC	6 AMP	4.7 nF	0.5mA MAX.
PLF-10DZB21	250V AC	10 AMP	3.3 nF	0.5mA MAX.
PLF-15DZB2	250V AC	15 AMP	3.3 nF	0.5mA MAX.

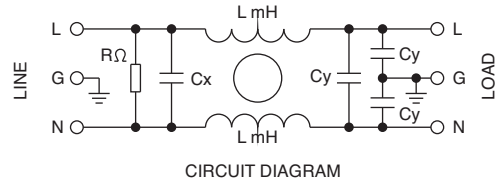


Insertion Loss in dB (Measured in 50Ω systems, as IEC / cispr No. 17)

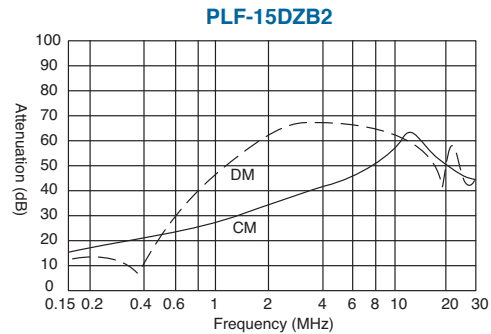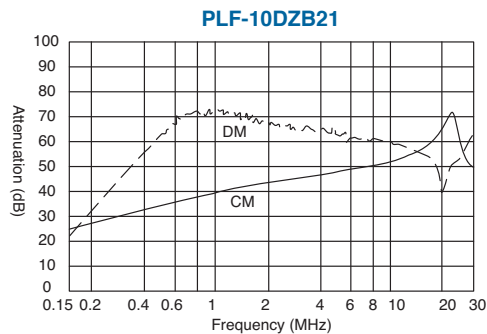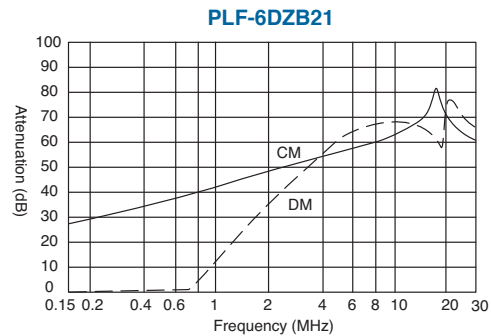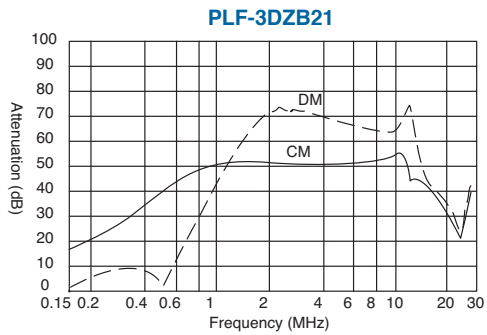



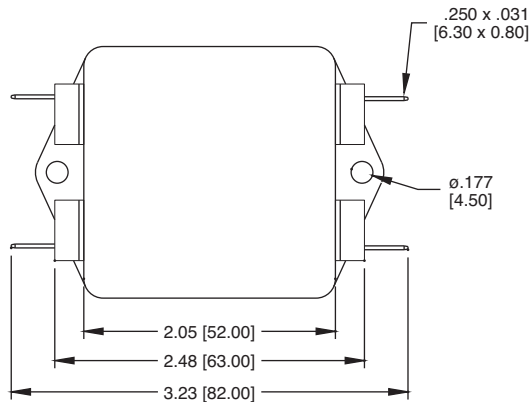



PLF-10D1

PART NUMBER	RATED VOLTAGE	RATED CURRENT	GROUND CAPACITANCE	LEAKAGE CURRENT
PLF-6D1	250V AC	6 AMP	3.3 nF	0.5mA MAX.
PLF-10D1	250V AC	10 AMP	3.3 nF	0.5mA MAX.
PLF-15D1	250V AC	15 AMP	3.3 nF	0.5mA MAX.

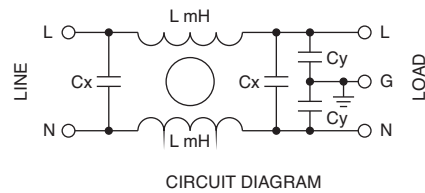


Insertion Loss in dB (Measured in 50Ω systems, as IEC / cispr No. 17)

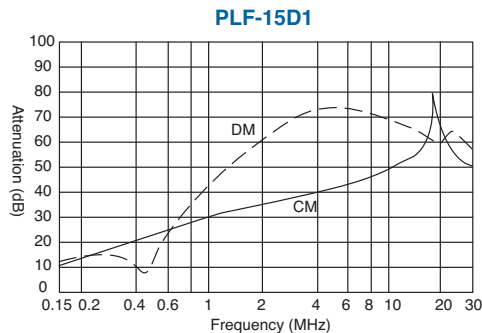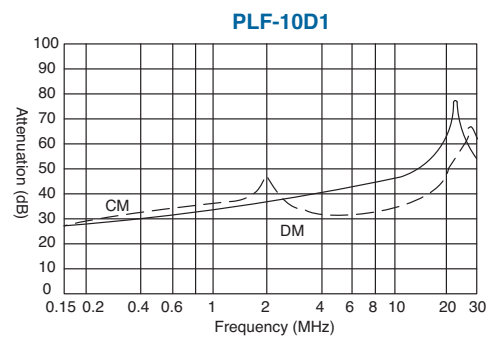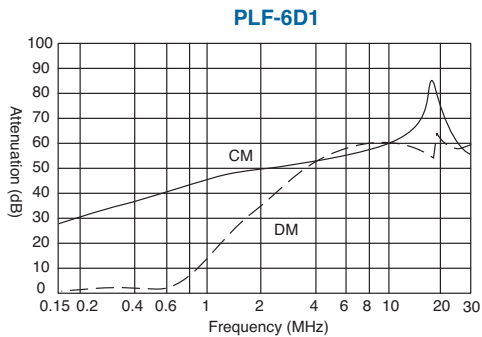




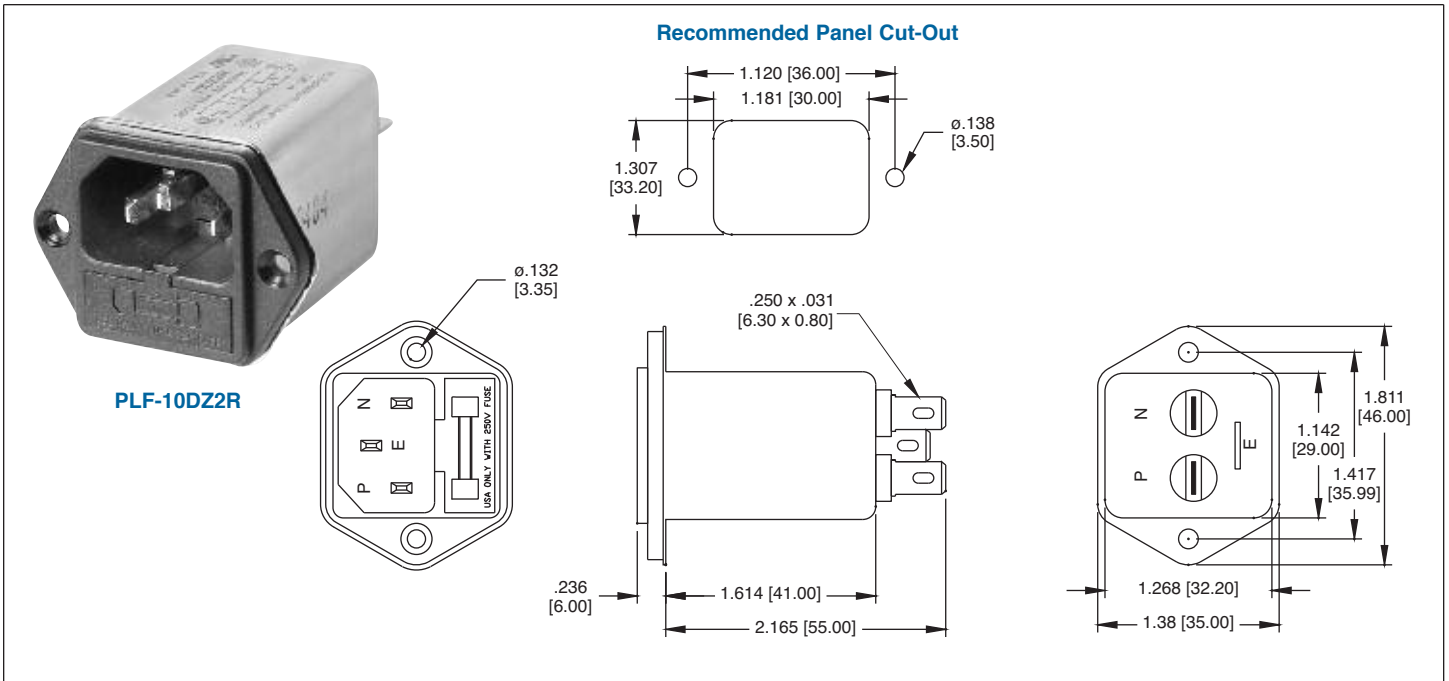



PART NUMBER	RATED VOLTAGE	RATED CURRENT	GROUND CAPACITANCE	LEAKAGE CURRENT
PLF-1DZ2R	250V AC	1 AMP	2.2 nF	0.5mA MAX.
PLF-3DZ2R	250V AC	3 AMP	2.2 nF	0.5mA MAX.
PLF-6DZ2R	250V AC	6 AMP	2.2 nF	0.5mA MAX.
PLF-10DZ2R	250V AC	10 AMP	2.2 nF	0.5mA MAX.

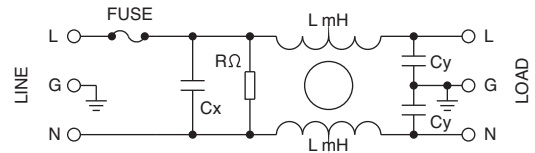


CIRCUIT DIAGRAM

Insertion Loss in dB (Measured in 50Ω systems, as IEC / cispr No. 17)

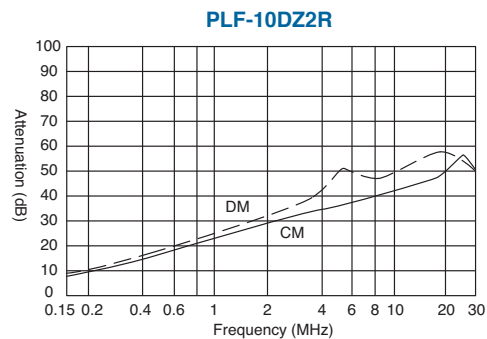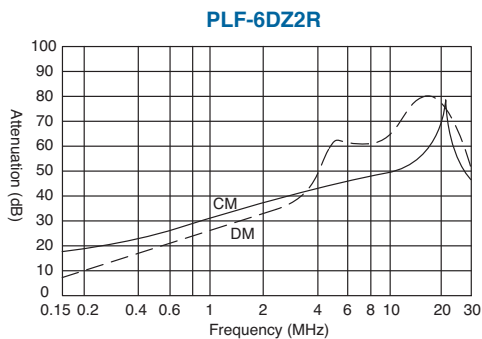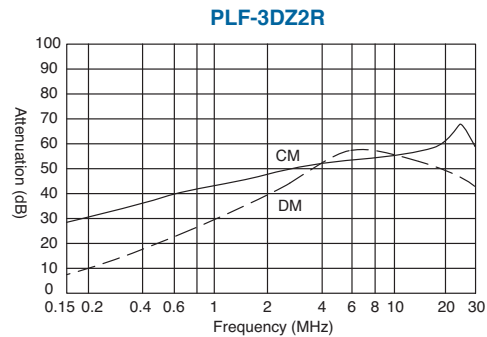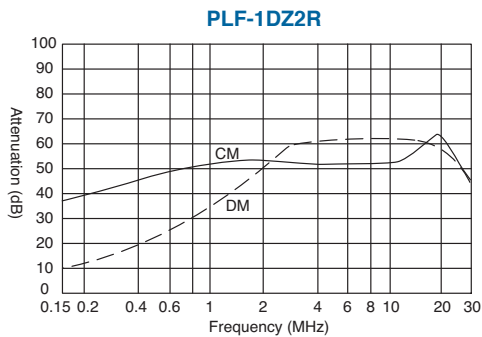


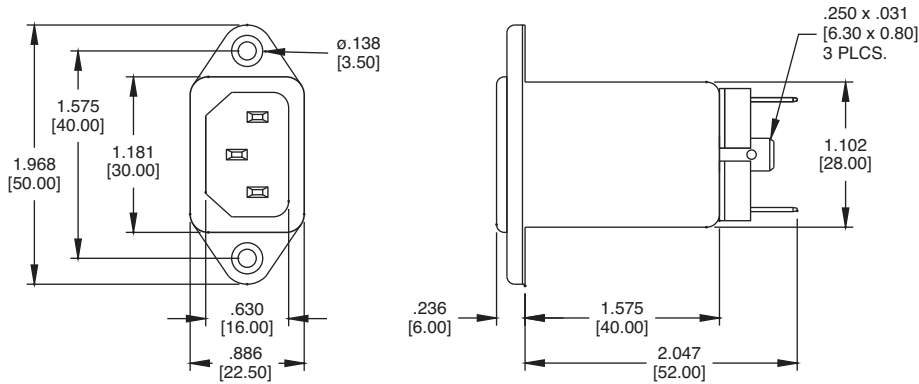

PLF-3DZ2

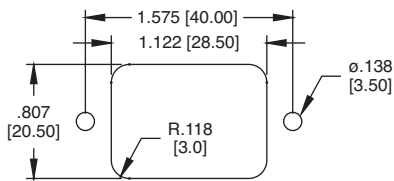


Recommended Panel Cut-Out



WIRE LEAD OPTION





PART NUMBER	RATED VOLTAGE	RATED CURRENT	GROUND CAPACITANCE	LEAKAGE CURRENT
PLF-1DZ2	250V AC	1 AMP	2.2 nF	0.5mA MAX.
PLF-3DZ2	250V AC	3 AMP	3.3 nF	0.5mA MAX.
PLF-6DZ2	250V AC	6 AMP	3.3 nF	0.5mA MAX.
PLF-10DZ2	250V AC	10 AMP	4.7 nF	0.5mA MAX.


Medical Grade available, PLF-XDZW2

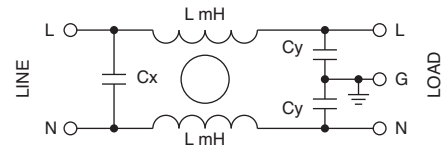

CIRCUIT DIAGRAM


Insertion Loss in dB (Measured in 50 Ω systems, as IEC / cispr No. 17)

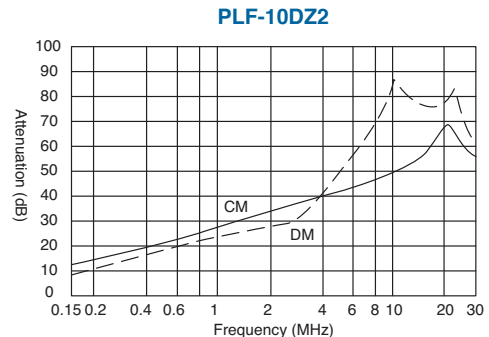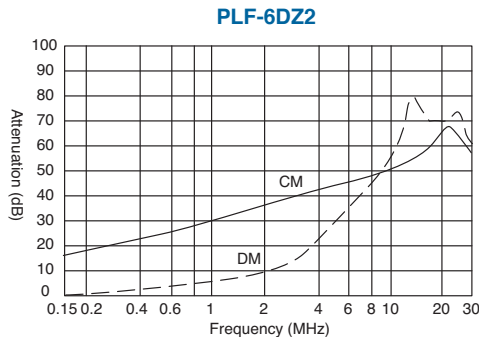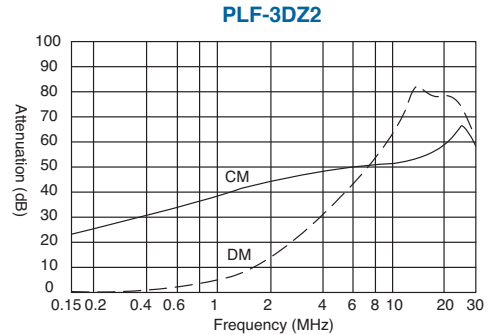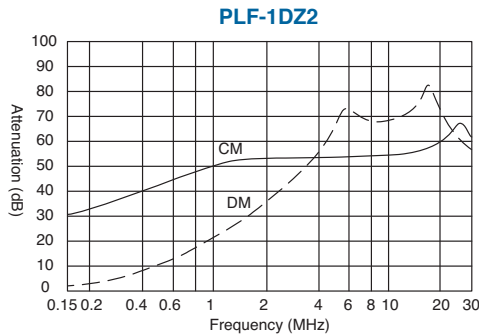

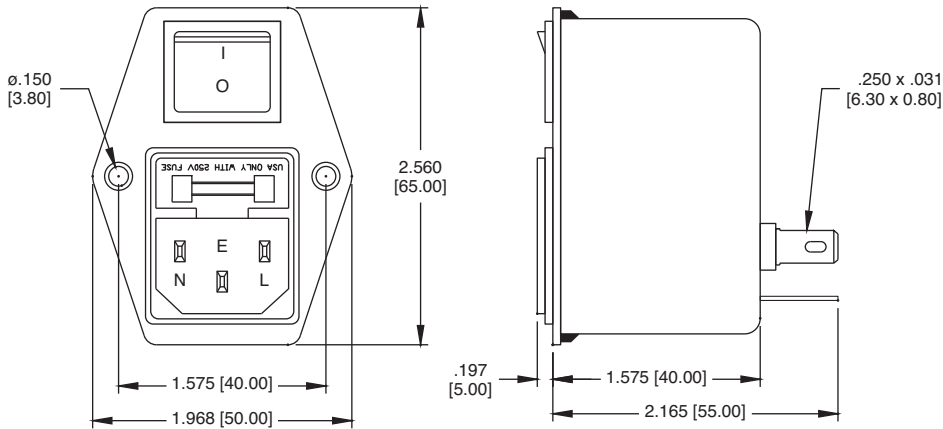

PLF-6DZ2KR

PART NUMBER	RATED VOLTAGE	RATED CURRENT	GROUND CAPACITANCE	LEAKAGE CURRENT
PLF-1DZ2KR	250V AC	1 AMP	2.2 nF	0.5mA MAX.
PLF-3DZ2KR	250V AC	3 AMP	2.2 nF	0.5mA MAX.
PLF-6DZ2KR	250V AC	6 AMP	2.2 nF	0.5mA MAX.
PLF-10DZ2KR	250V AC	10 AMP	2.2 nF	0.5mA MAX.

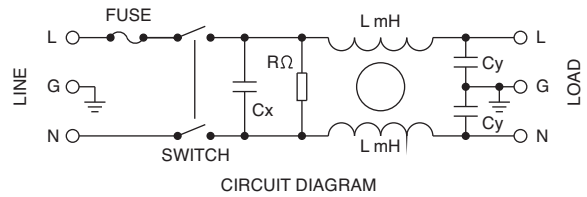

Insertion Loss in dB (Measured in 50Ω systems, as IEC / cispr No. 17)

