

# Open Carrier Double-Balanced Mixer For Microwave Telecommunications

Rev. V2

#### **Features**

- LO 2.2 TO 8.0 GHz
- RF 3.4 TO 7.0 GHz
- IF DC TO 20. GHz
- LO DRIVE +13 (NOMINAL)
- MICROSTRIP INTERFACE

#### **Description**

The MC2320 is a double balanced mixer, designed for use in military, commercial and test equipment applications. The design utilizes Schottky ring quad diodes and broadband soft dielectric and ferrite baluns to attain excellent performance. This mixer can also be used as a phase detector and/or bi-phase modulator since the IF port is DC coupled to the diodes. The use of high temperature solder and welded assembly processes used internally makes it ideal for use in manual, semi-automated assembly. Environmental screening available to MIL-STD-883, MIL-STD-202, or MIL-DTL-28837, consult factory.

# Product Image



#### **Ordering Information**

Part Number	Package		
MC2320	Open Carrier		
MC2320-2	Open Carrier		

#### Electrical Specifications: $Z_0 = 50\Omega$ Lo = +13 dBm (Downconverter application only)

Parameter Test Conditions		Units	Typical	Guaranteed	
Parameter	rai ameter rest Conditions			+25°C	-54º to +85ºC
SSB Conversion Loss (max) & SSB Noise Figure (max)	fR=3.4 to 7 GHz, fL=2.2 to 8 GHz, fl=0.05 to 0.5 GHz fR=3.4 to 7 GHz, fL=2.2 to 8 GHz, fl=0.05 to 1.5 GHz fR=3.4 to 7 GHz, fL=2.2 to 8 GHz, fl=0.05 to 2 GHz		5.2 6.5 7.0	7.0 8.0 8.5	7.5 8.5 8.0
Isolation, L to R (min)	fL = 2.2 to 3 GHz fL = 3 to 8 GHz		25 40	18 28	16 26
Isolation, L to I (min)	fL = 2.2 to 3 GHz fL = 3 to 4 GHz fL = 4 to 8 GHz		20 30 42	13 18 30	11 16 28
Isolation, R to I (min)	fL = 3.4 to 7 GHz		26		
1 dB Conversion Comp.	fL = +20 dBm	dBm	+14		
Input IP3	fR1 = 4.2 GHz at -10 dBm, fR2 = 4.21 at -10 dBm, fL = 2.7 GHz at +20 dBm fR1 = 6 GHz at -10 dBm, fR2 = 6.01 at -10 dBm, fL = 4.5 GHz at +20 dBm		+16 +17		

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.

PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology

Solutions has under development. Performance is based on engineering tests. Specifications are

typical. Mechanical outline has been fixed. Engineering samples

Commitment to produce in volume is not du

<sup>•</sup> North America Tel: 800.366.2266 • Europe Tel: +353.21.244.6400

India Tel: +91.80.4155721
 China Tel: +86.21.2407.1588


Visit www.macomtech.com for additional data sheets and product information.





### **Open Carrier Double-Balanced Mixer** For Microwave Telecommunications


Rev. V2

# **Typical Performance Curves**

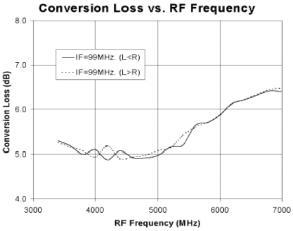


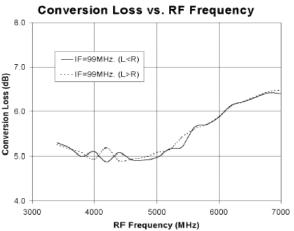


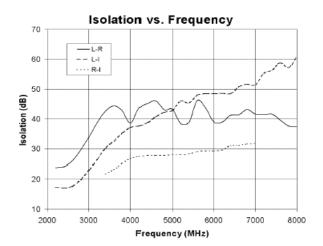


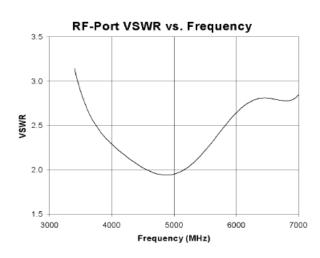

#### Conversion Loss vs. RF Frequency

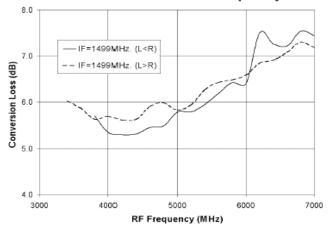

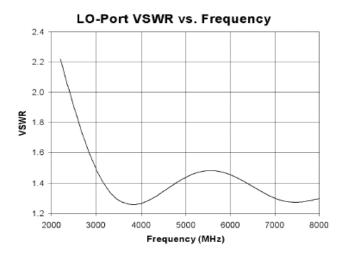

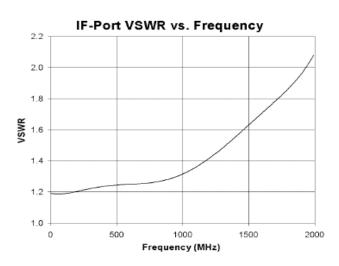

PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples

- North America Tel: 800.366.2266 Europe Tel: +353.21.244.6400
- India Tel: +91.80.4155721 • China Tel: +86.21.2407.1588 Visit www.macomtech.com for additional data sheets and product information.

Commitment to produce in volume is not du




## **Open Carrier Double-Balanced Mixer** For Microwave Telecommunications

Rev. V2

#### **Absolute Maximum Ratings**

Parameter	Absolute Maximum		
Operating Temperature	-54°C to +85°C		
Storage Temperature	-65°C to +100°C		
Peak Input Power	+23 dBm max @ +25°C +20 dBm max @ +85°C		
Peak Input Current	50 mA DC		

# Outline Drawing: Open Carrier \*MC2320

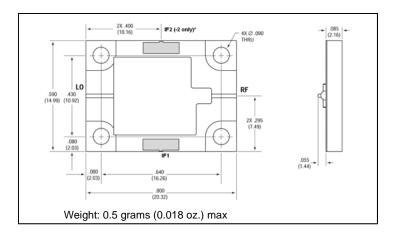

\*For the base model, only the IF1 port is connected. For the "-2" model, only the IF2 port is connected.

Dimensions are inches (millimeters) ±0.015 (0.38) unless otherwise specified.

Solutions has under development. Performance is based on engineering tests. Specifications are

typical. Mechanical outline has been fixed. Engineering samples

Commitment to produce in volume is not du