

# **VCO-204S/STC**

### HIGH RELIABILITY MILITARY AND SPACE VCO

Package: Module, 22.86mmx22.86mmx13.97mm




### **Features**

- 100 MHz to 200 MHz VCO
- 15V Operation
- +13.0dBm Typical Output Power
- -112dBc/Hz at 10kHz
- -135dBc/Hz at 100kHz
- -155dBc/Hz at 1000kHz

### **Applications**

- Instrumentation
- Aerospace
- Test Equipment
- Plug and Play

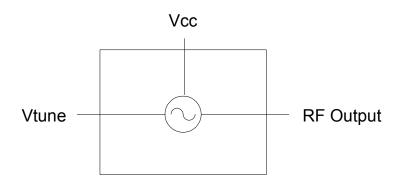

Functional Block Diagram

### **Product Description**

RFMD's VCO-204S/STC is a hybrid assembled voltage controlled oscillator integrated into a connectorized module. The VCO-204 features an integrated resonator and tuning varactors. The part features excellent performance over temperature.

#### **Ordering Information**

VCO-204S/STC High Reliability Military and Space VCO

## Optimum Technology Matching® Applied

☐ GaAs HBT	☐ SiGe BiCMOS	☐ GaAs pHEMT	☐ GaN HEMT
☐ GaAs MESFET	☐ Si BiCMOS	□ si cmos	☐ BiFET HBT
☐ InGaP HBT	☐ SiGe HBT	▼ Si BJT	☐ LDMOS

RF MIGO DEVICES®, RFMD®, Optimum Technology Matching®, Enabling Wireless Connectivity®, PowerStar®, POLARIS® 'TOTAL RADIO® and UltimateBlue® are trademarks of RFMD, LLC. BLUETOOTH is a tomark owned by Bluetooth SIG, inc., U.S.A. and licensed for use by RFMD. All other trade names, grademarks and regidemarks and regidemarks and regide trademarks are the property of their respective owners. ©2006, RFM licen Devices, and the property of the prop

# **VCO-204S/STC**



### **Absolute Maximum Ratings**

Parameter	Rating	Unit
Supply Voltage (V <sub>CC</sub> )	17	V
V <sub>TUNE</sub>	0 to 22	V
Storage Temperature	-65 to 150	°C
Operating Temperature	-55 to 100	°C
ESD JESD22 - A114 Human Body Model (HBM)		V



#### Caution! ESD sensitive device.

Exceeding any one or a combination of the Absolute Maximum Rating conditions may cause permanent damage to the device. Extended application of Absolute Maximum Rating conditions to the device may reduce device reliability. Specified typical performance or functional operation of the device under Absolute Maximum Rating conditions is not implied.

RoHS status based on EUDirective 2002/95/EC (at time of this document revision).


The information in this publication is believed to be accurate and reliable. However, no responsibility is assumed by RF Micro Devices, Inc. ("RFMD") for its use, nor for any infringement of patents, or other rights of third parties, resulting from its use. No license is granted by implication or otherwise under any patent or patent rights of RFMD. RFMD reserves the right to change component circuitry, recommended application circuitry and specifications at any time without prior notice.

Dovometer	Specification		l losit	0 - 1111 - 1		
Parameter	Min. Typ. Ma		Max.	Unit	Condition	
Frequency						
Frequency Range	100		200	MHz	100% Production Tested	
Tuning Voltage						
100MHz	0	1.3		$V_{DC}$	100% Production Tested	
200MHz		17.9	20	V <sub>DC</sub>	100% Production Tested	
Tuning Sensitivity						
100 MHz	4.8	6.4	8	MHz/V	100% Production Tested	
125MHz	4.7	6.3	7.8	MHz/V	100% Production Tested	
150MHz	5.8	7.7	9.7	MHz/V	100% Production Tested	
175MHz	4.7	6.3	7.8	MHz/V	100% Production Tested	
200MHz	2.6	3.5	4.4	MHz/V	100% Production Tested	
Output Power	10	13	16	dBm	100% Production Tested	
Output Phase Noise						
10 kHz		-112	-106	dBc/Hz	100% Production Tested	
100 kHz		-135	-129	dBc/Hz	100% Production Tested	
1000 kHz		-155	-149	dBc/Hz	100% Production Tested	
Power Supply	14.75	15	15.25	V	100% Production Tested	
Supply Current		13.5	15	mA	100% Production Tested	
Harmonic Suppression						
2nd Harmonic		-25	-20	dBc	100% Production Tested	
3rd Harmonic		-18	-15	dBc	100% Production Tested	
Spurious (Non-Harmonic)			-80	dBc		
Frequency Pushing		0.5	0.8	MHz p-p	14V to 16V	
Frequency Pulling		3	4	MHz p-p	12dB RL	
Output Impedance		50		Ω		
3dB Modulation Bandwidth	4000	7000		kHz	$Z_G=50\Omega$	
Tune Port Impedance (DC)		50		kΩ		



Pin	Function	Description
1	VTUNE	Tuning voltage.
2	VCC	Supply voltage.
3	RF Output	VCO RF output.

## **Pin Out and Package Drawing**

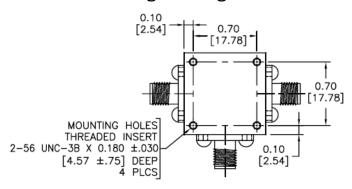

0.55

PINOUT	FUNCTION			
PIN	vco	MIXER	POWER DIVIDER	
1	TUNING VOLTAGE	RF PORT	OUT 2	
2	SUPPLY VOLTAGE	X PORT	IN	
3	RF OUTPUT	LO PORT	OUT 1	

