



## TS4994 low voltage differential audio power amplifier Evaluation board user guidelines

### Features

- TS4994 low voltage differential audio power amplifier with programmable standby mode
- Operating range from  $V_{CC}= 2.5V$  to  $5.5V$
- 1W output power @  $V_{CC}= 5V$ , THD=1%, F= 1kHz, with  $8\Omega$  load
- Ultra low power consumption in standby mode (10nA)
- 100dB PSRR @ 217Hz in grounded mode ( $A_v=1V/V$ )
- Near zero pop & click
- Ultra low distortion (0.1%)
- Module gain set at  $1V/V$
- Thermal and short-circuit protection

### Description

The DEMO TS4994 is an evaluation board designed for the TS4994 low power differential audio amplifier. The micropackage DFN10 (dual flat non leaded 10 pins) allows space saving and good thermal dissipation.

The differential gain is set at  $1V/V$  and can be adapted if necessary with a modification of  $R1$  to  $R4$  values.  $A_v=R2/R1=R4/R3$  with  $R1=R3$  and  $R2=R4$ .

On the board, you can set the Cn3 and Cn4 jumpers to modify the input configuration from capacitor coupled to common mode feedback. In capacitor coupled configuration, the -3dB cut-off frequency in Hz is:

$$1/(6.28 \times R1 \times C1) = 1/(6.28 \times R3 \times C2)$$

with R in Ohm, C in Farad and  $C1=C2$ .

For more detailed information about component calculation, refer to the TS4994 datasheet.


# 1 Evaluation board connector configuration

Connectors	Description
Cn1 and Cn2	Input signal connector (GND and active input signal).
Cn3 and Cn4	Connectors to modify input configuration (from capacitor coupled = no jumper to common mode feedback = short-circuit).
Cn5	Output signal connector ( $V_{o+}$ and $V_{o-}$ )
Cn6	Mode standby control connector (GND, standby, $V_{CC}$ ). Allows you to select standby mode active high or low.
Cn7	Standby control connector (GND, standby, $V_{CC}$ ).
Cn8	Power connector ( $V_{CC}$ and GND). Power supply voltage from 2.5V to 5.5V.

**Caution:** When you apply power supply through Cn8, DO NOT invert the polarity because it would destroy the amplifier U1.

# 2 Schematic diagram

Figure 1. Schematic diagram of the TS4994 DFN10

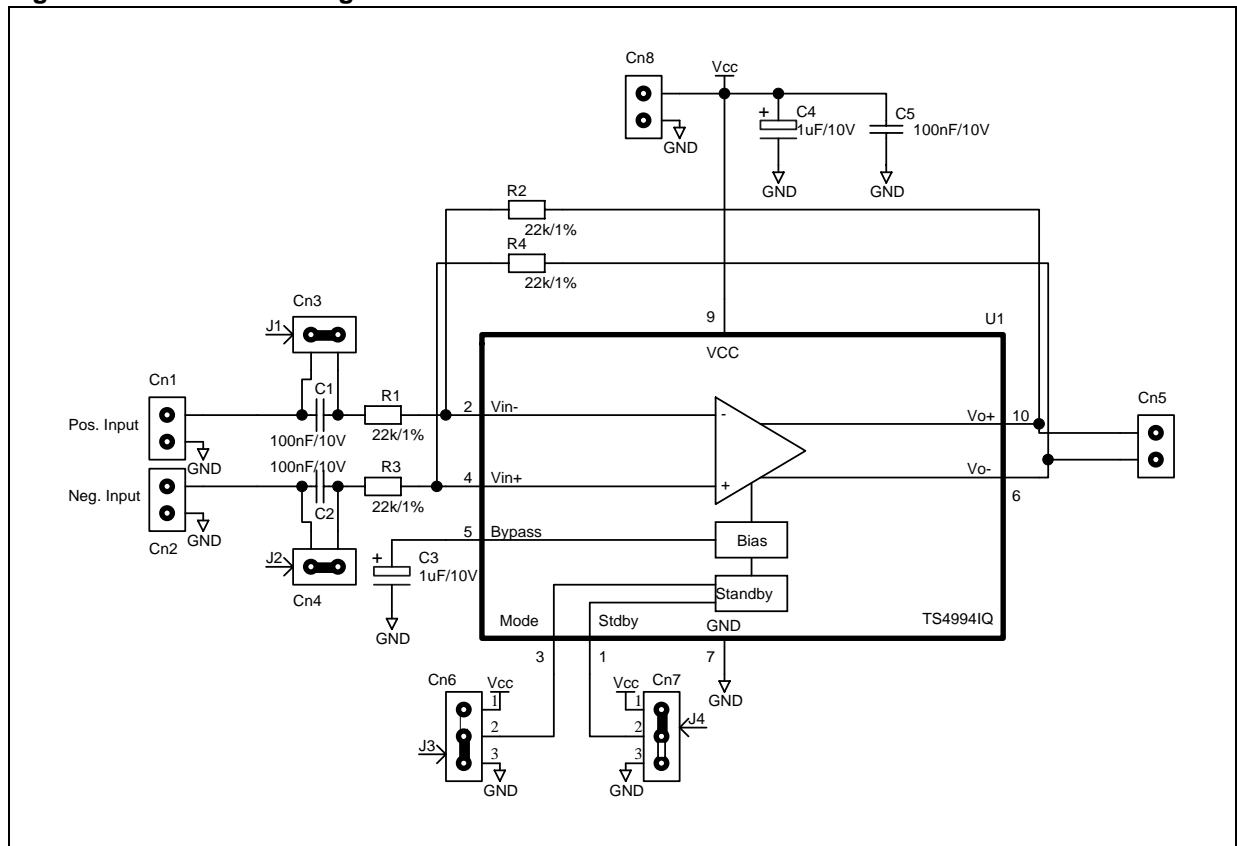

**Table 1. Component list for the DEMO TS4994 DFN10**

Designation	Quantity	Description
C1	1	100nF/16V, ceramic capacitors, 0603
C2	1	100nF/16V, ceramic capacitors, 0603
C3	1	1 $\mu$ F/50V, electrolytic capacitor
C4	1	1 $\mu$ F/50V, electrolytic capacitor
C5	1	100nF/16V, ceramic capacitors, 0603
Cn1	1	2 pins header 2.54mm pitch
Cn2	1	2 pins header 2.54mm pitch
Cn3	1	2 pins header 2.54mm pitch
Cn4	1	2 pins header 2.54mm pitch
Cn5	1	2 pins header 2.54mm pitch
Cn6	1	3 pins header 2.54mm pitch
Cn7	1	3 pins header 2.54mm pitch
Cn8	1	2 pins header 2.54mm pitch
J1 to J4	4	Jumper, 2.54mm pitch
R1	1	22k $\Omega$ , 1/16W 1% resistor, 0603
R2	1	22k $\Omega$ , 1/16W 1% resistor, 0603
R3	1	22k $\Omega$ , 1/16W 1% resistor, 0603
R4	1	22k $\Omega$ , 1/16W 1% resistor, 0603
U1	1	TS4994IQ (DFN10 package)

### 3 Evaluation board layout

The following figures show the layers and the top view of the TS4994 demoboard.

Figure 2. PCB top layer

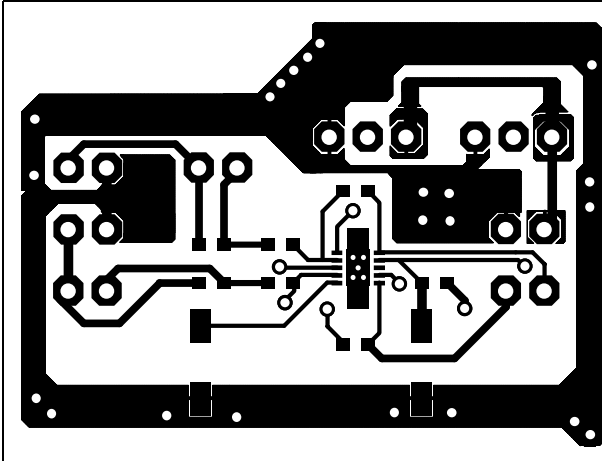


Figure 3. PCB bottom layer


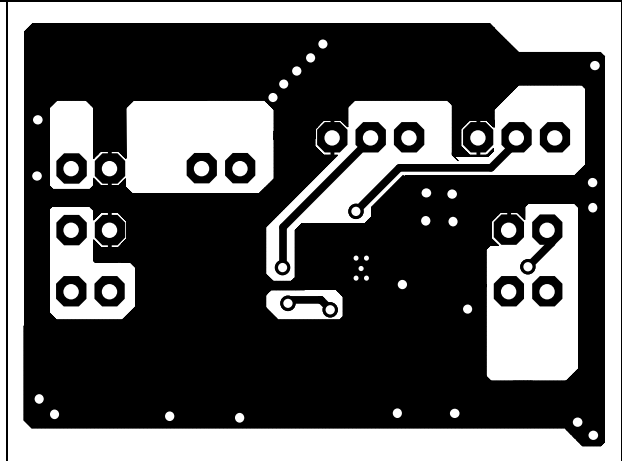


Figure 4. Top view of demoboard

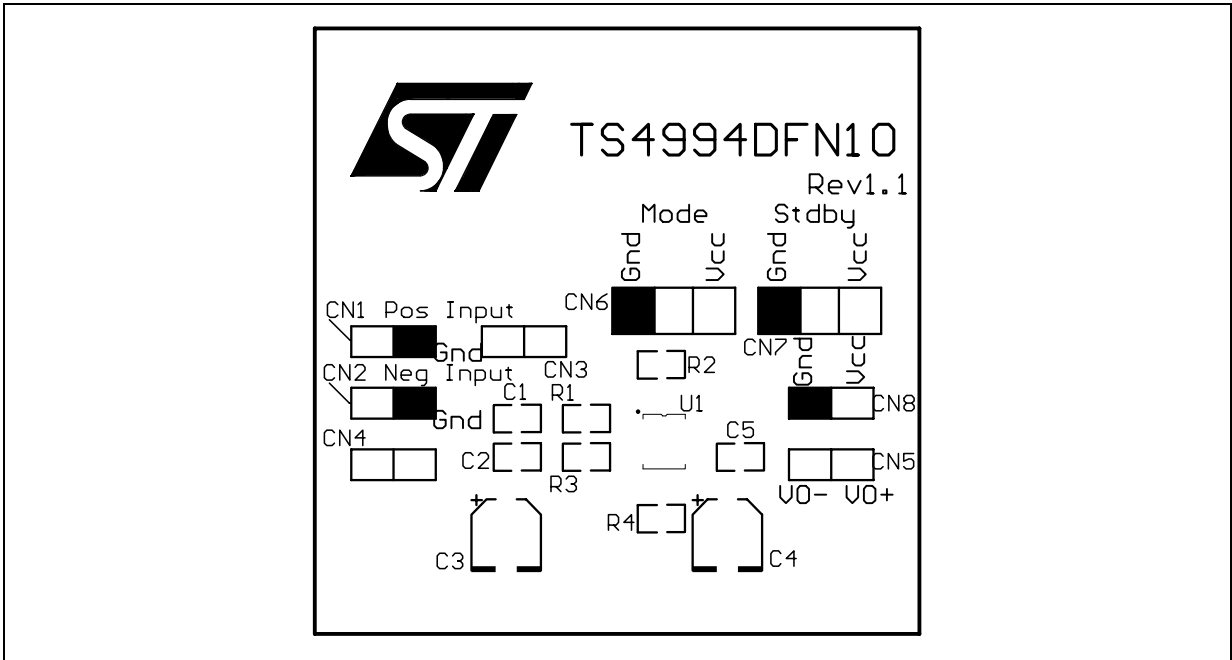

## Revision history

Date	Revision	Changes
3-Aug-2004	1	Initial release.
8-Dec-2006	2	Format update.
16- Apr-2007	3	<i>Figure 4</i> updated (PCB is now Rev 1.1).

**Please Read Carefully:**

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

**UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.**

**UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.**

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2007 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

[www.st.com](http://www.st.com)