

VCO-205S/STC

HIGH RELIABILITY MILITARY AND SPACE VCO

Package: Module, 22.86mmx22.86mmx13.97mm




Features

- 200 MHz to 400 MHz VCO
- 15V Operation
- +12.0dBm Typical Output Power
- -105dBc/Hz at 10kHz
- -130dBc/Hz at 100kHz
- -150dBc/Hz at 1000kHz

Applications

- Instrumentation
- Aerospace
- Test Equipment
- Plug and Play

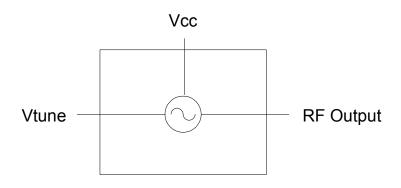

Functional Block Diagram

Product Description

RFMD's VCO-205S/STC is a hybrid assembled voltage controlled oscillator integrated into a connectorized module. The VCO-205 features an integrated resonator and tuning varactors. The part features excellent performance over temperature.

Ordering Information

VCO-205S/STC High Reliability Military and Space VCO

Optimum Technology Matching® Applied ☐ SiGe BiCMOS ☐ GaAs pHEMT ☐ GaN HEMT

☐ GaAs HBT	☐ SiGe BiCMOS	☐ GaAs pHEMT
☐ GaAs MESFET	☐ Si BiCMOS	□ Si CMOS
☐ InGaP HBT	☐ SiGe HBT	▼ Si BJT

y Matching®, Enabling Wireless Connectivity™, PowerStar®, POLARIS™ TOTAL RADIO™ and UltimateBlue™ are trademarks of RFMD, LLC. BLUETOOTH is a

☐ BiFET HBT

□ LDMOS

VCO-205S/STC



Absolute Maximum Ratings

Parameter	Rating	Unit
Supply Voltage (V _{CC})	17	V
V _{TUNE}	0 to 22	V
Storage Temperature	-65 to 150	°C
Operating Temperature	-55 to 100	°C
ESD JESD22 - A114 Human Body Model (HBM)		V



Caution! ESD sensitive device.

Exceeding any one or a combination of the Absolute Maximum Rating conditions may cause permanent damage to the device. Extended application of Absolute Maximum Rating conditions to the device may reduce device reliability. Specified typical performance or functional operation of the device under Absolute Maximum Rating conditions is not implied.

RoHS status based on EUDirective 2002/95/EC (at time of this document revision).


The information in this publication is believed to be accurate and reliable. However, no responsibility is assumed by RF Micro Devices, Inc. ("RFMD") for its use, nor for any infringement of patents, or other rights of third parties, resulting from its use. No license is granted by implication or otherwise under any patent or patent rights of RFMD. RFMD reserves the right to change component circuitry, recommended application circuitry and specifications at any time without prior notice.

Dovometer	Specification Min. Typ. Max.		l lmit	0.000	
Parameter			Max.	Unit	Condition
Frequency					
Frequency Range	200		400	MHz	100% Production Tested
Tuning Voltage					
200MHz	0	1.4		V _{DC}	100% Production Tested
400MHz		16.1	20	V _{DC}	100% Production Tested
Tuning Sensitivity					
200MHz	8.4	11.1	13.9	MHz/V	100% Production Tested
250MHz	10.4	13.9	17.3	MHz/V	100% Production Tested
300MHz	16.1	21.5	26.8	MHz/V	100% Production Tested
350MHz	10.7	14.3	17.9	MHz/V	100% Production Tested
400MHz	6.3	8.4	10.5	MHz/V	100% Production Tested
Output Power	10	12	16	dBm	100% Production Tested
Output Phase Noise					
10 kHz		-105	-99	dBc/Hz	100% Production Tested
100 kHz		-130	-124	dBc/Hz	100% Production Tested
1000 kHz		-150	-144	dBc/Hz	100% Production Tested
Power Supply	14.75	15	15.25	V	100% Production Tested
Supply Current		13	15	mA	100% Production Tested
Harmonic Suppression					100% Production Tested
2nd Harmonic		-21	-19	dBc	100% Production Tested
3rd Harmonic		-16	-14	dBc	100% Production Tested
Spurious (Non-Harmonic)			-80	dBc	
Frequency Pushing		1	2	MHz p-p	14.75V to 15.25V
Frequency Pulling		5	10	MHz p-p	12dB RL
Output Impedance		50		Ω	
3dB Modulation Bandwidth	7000	10000		kHz	$Z_G=50\Omega$
Tune Port Impedance (DC)		50		kΩ	



Pin	Function	Description
1	VTUNE	Tuning voltage.
2	VCC	Supply voltage.
3	RF Output	VCO RF output.

Pin Out and Package Drawing

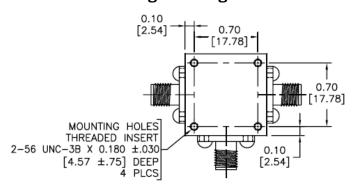

0.55

PINOUT	FUNCTION			
PIN	vco	MIXER	POWER DIVIDER	
1	TUNING VOLTAGE	RF PORT	OUT 2	
2	SUPPLY VOLTAGE	X PORT	IN	
3	RF OUTPUT	LO PORT	OUT 1	

