



# FAN7317B

## LCD Backlight Inverter Drive IC

### Features

- High-Efficiency, Single-Stage Power Conversion
- Wide Input Voltage Range: 6V to 28V
- Backlight Lamp Ballast and Soft Dimming
- Minimal Required External Components
- Precision Voltage Reference Trimmed to 2%
- ZVS Full-Bridge Topology
- Soft-Start
- PWM Control at Fixed Frequency
- Burst Dimming Function
- Dynamic Contrast Ratio Function
- Programmable Striking Frequency
- Open-Lamp Protection (OLP)
- Open-Lamp Regulation (OLR)
- Short-Lamp Protection (SLP)
- Thermal Shutdown (TSD)
- 20-Pin SOIC

### Applications

- LCD TV
- LCD Monitor

### Description

The FAN7317B is a LCD backlight inverter drive IC that controls P-N full-bridge topology using a new propriety phase-shift method.

The FAN7317B provides a low-cost solution and reduces external components by integrating full wave rectifiers for open-lamp protection and regulation (patent pending). The operating voltage range of the FAN7317B is wide, so an external regulator isn't necessary to supply the voltage to the IC.

The FAN7317B provides protections such as open-lamp regulation, open-lamp protection, and short-lamp protection to increase the system reliability. The FAN7317B provides a burst-dimming function and analog dimming is possible, in a narrow range, by adding external components.

The FAN7317B is available in a 20-pin SOIC package.

20-SOIC



### Ordering Information

| Part Number | Operating Temperature | Package                                        | Packing Method |
|-------------|-----------------------|------------------------------------------------|----------------|
| FAN7317BM   | -25 to +85°C          | 20-Pin Small Outline Integrated Circuit (SOIC) | Rail           |
| FAN7317BMX  |                       |                                                | Tape and Reel  |

## Typical Application Circuit (LCD Backlight Inverter)

| Application         | Device   | Input Voltage Range | Number of Lamps |
|---------------------|----------|---------------------|-----------------|
| 22-Inch LCD Monitor | FAN7317B | 13±10%              | 4               |

### 1. Features

- High-Efficiency Single-Stage Power Conversion
- P-N Full-Bridge Topology
- Reduces Required External Components
- Enhanced System Reliability through Protection Functions

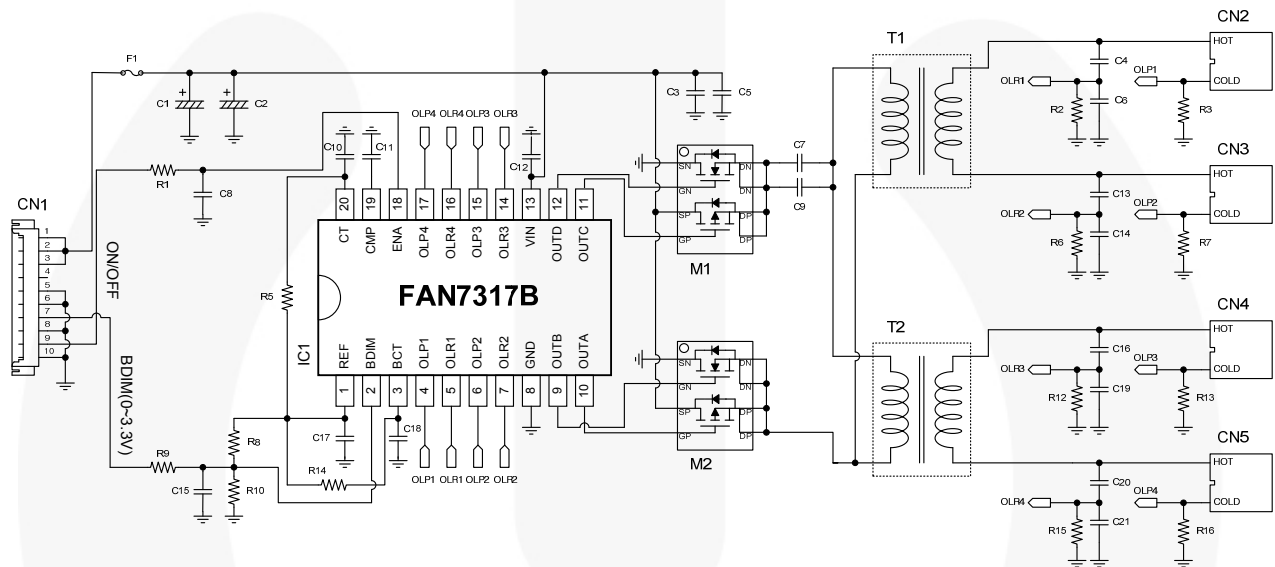


Figure 55. Typical Application Circuit

### 2. Transformer Schematic Diagram

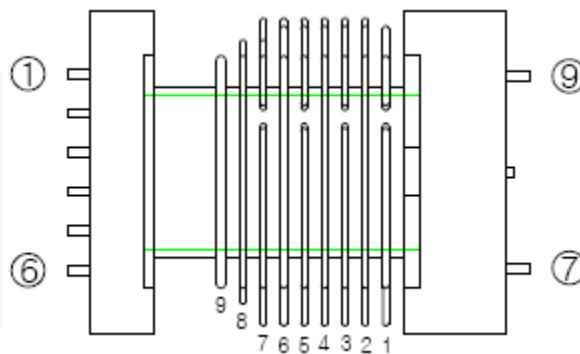


Figure 56. Transformer Schematic Diagram

### 3. Core & Bobbin

- Core: EFD2126
- Material: PL7
- Bobbin: EFD2126

## Physical Dimensions

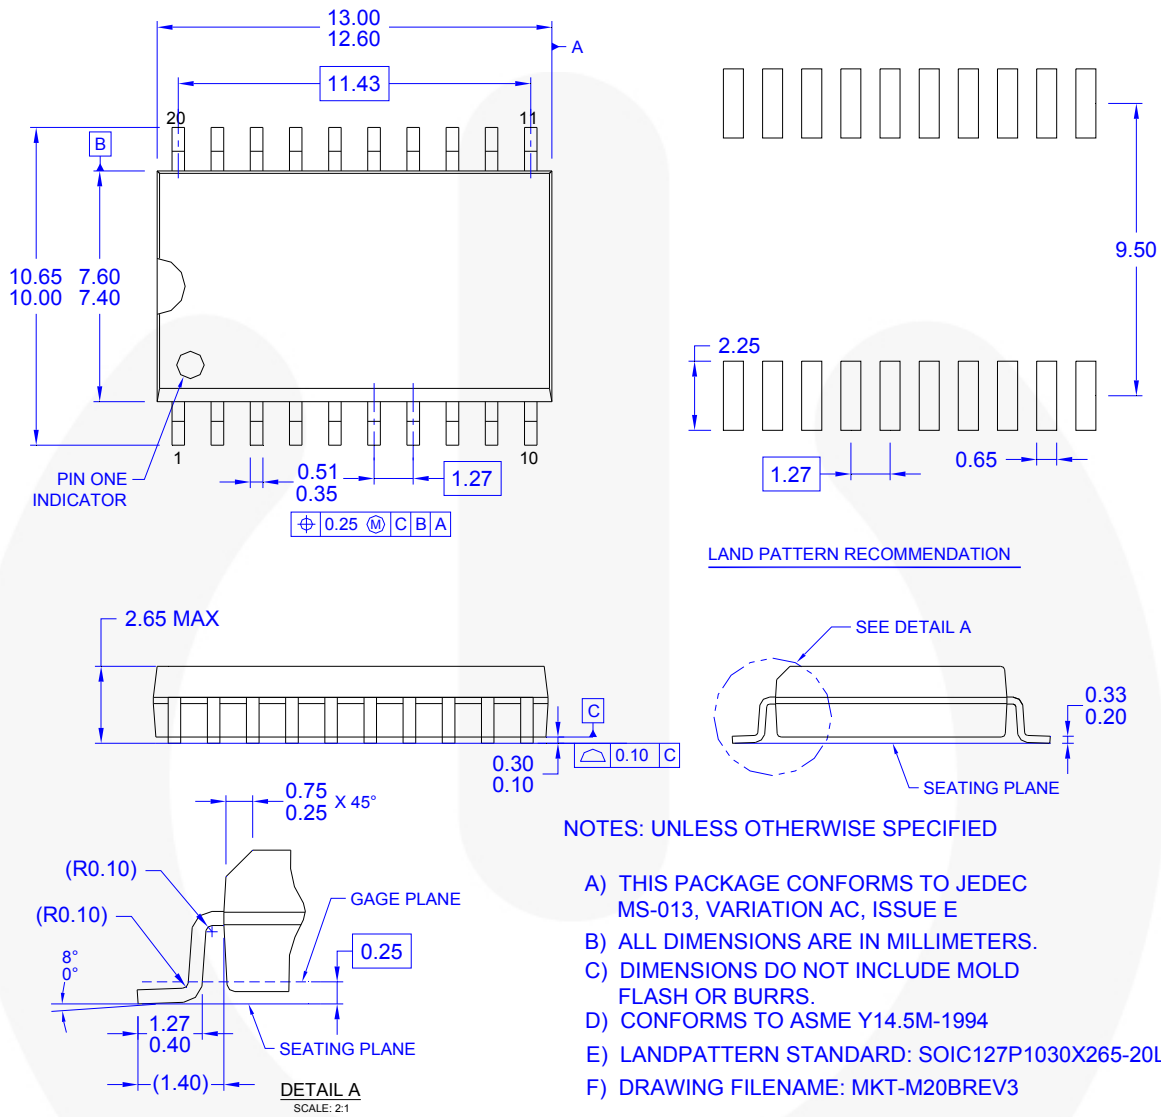


Figure 57. 20-Pin, Small Outline Integrated Circuit (SOIC) Package

Package drawings are provided as a service to customers considering Fairchild components. Drawings may change in any manner without notice. Please note the revision and/or date on the drawing and contact a Fairchild Semiconductor representative to verify or obtain the most recent revision. Package specifications do not expand the terms of Fairchild's worldwide terms and conditions, specifically the warranty therein, which covers Fairchild products.

Always visit Fairchild Semiconductor's online packaging area for the most recent package drawings:  
<http://www.fairchildsemi.com/packaging/>



## TRADEMARKS

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

|                          |                        |                                       |                                        |
|--------------------------|------------------------|---------------------------------------|----------------------------------------|
| AccuPower™               | FPS™                   | Power-SPM™                            | The Power Franchise®                   |
| Auto-SPM™                | F-PFS™                 | PowerTrench®                          | The Right Technology for Your Success™ |
| AX-CAP™                  | FRFET®                 | PowerXS™                              |                                        |
| BitSiC®                  | Global Power Resource™ | Programmable Active Droop™            |                                        |
| Build it Now™            | Green FPS™             | QFET®                                 |                                        |
| CorePLUS™                | Green FPS™ e-Series™   | QST™                                  |                                        |
| CorePOWER™               | Gmax™                  | Quiet Series™                         |                                        |
| CROSSVOLT™               | GTO™                   | Rapid Configure™                      |                                        |
| CTL™                     | IntelliMAX™            |                                       |                                        |
| Current Transfer Logic™  | ISOPLANAR™             | Saving our world, 1mW/W/KW at a time™ |                                        |
| DEUXPEED®                | MegaBuck™              | SignalWise™                           |                                        |
| Dual Cool™               | MICROCOUPLER™          | SmartMax™                             |                                        |
| EcoSPARK®                | MicroFET™              | SMART START™                          |                                        |
| EfficientMax™            | MicroPak™              | SPM®                                  |                                        |
| ESBC™                    | MicroPak2™             | STEALTH™                              |                                        |
| <b>F</b> ®               | MillerDrive™           | SuperFET®                             |                                        |
| Fairchild®               | MotionMax™             | SuperSOT™-3                           |                                        |
| Fairchild Semiconductor® | Motion-SPM™            | SuperSOT™-6                           |                                        |
| FACT Quiet Series™       | mWSaver™               | SuperSOT™-8                           |                                        |
| FACT®                    | OptoHiT™               | SupreMOS®                             |                                        |
| FAST®                    | OPTOLOGIC®             | SyncFET™                              |                                        |
| FastvCore™               | OPTOPLANAR®            | Sync-Lock™                            |                                        |
| FETBench™                |                        | <b>SYSTEM GENERAL</b>                 |                                        |
| FlashWriter®             | PDP SPM™               |                                       |                                        |

\* Trademarks of System General Corporation, used under license by Fairchild Semiconductor.

## DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN, NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

## LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

## ANTI-COUNTERFEITING POLICY

Fairchild Semiconductor Corporation's Anti-Counterfeiting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, [www.fairchildsemi.com](http://www.fairchildsemi.com), under Sales Support.

Counterfeiting of semiconductor parts is a growing problem in the industry. All manufacturers of semiconductor products are experiencing counterfeiting of their parts. Customers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed applications, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fairchild strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handling and storage and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address any warranty issues that may arise. Fairchild will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. Fairchild is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

## PRODUCT STATUS DEFINITIONS

### Definition of Terms

| Datasheet Identification | Product Status        | Definition                                                                                                                                                                                          |
|--------------------------|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Advance Information      | Formative / In Design | Datasheet contains the design specifications for product development. Specifications may change in any manner without notice.                                                                       |
| Preliminary              | First Production      | Datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design. |
| No Identification Needed | Full Production       | Datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design.                                               |
| Obsolete                 | Not In Production     | Datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The datasheet is for reference information only.                                                    |

Rev. 154